




## Wabendraht für Rähmchen



### Edelstahldraht Lebensmittelecht

entspricht den Anforderungen der europäischen Richtlinie 1935/2004/EG

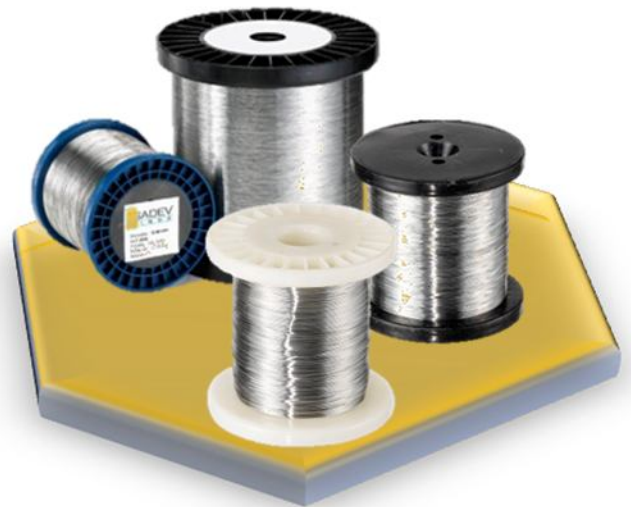

Spule		Zugfestigkeit N/mm <sup>2</sup>	Ø 0,40 mm		Ø 0,45mm		Ø 0,50mm	
Gewicht	DIN		Lauf­länge	Traglast Total in Kg	Lauf­länge	Traglast Total in Kg	Lauf­länge	Traglast Total in Kg
<b>250 g</b>	80	600 - 800	<b>250 m</b>	7-10	<b>200 m</b>	9-13	<b>160 m</b>	11-13
<b>500 g</b>	80	600 - 800	<b>500 m</b>	7-10	<b>400 m</b>	9-13	<b>320 m</b>	11-13
<b>1 Kg</b>	100	600 - 800	<b>1000 m</b>	7-10	<b>800 m</b>	9-13	<b>640 m</b>	11-13
<b>3 Kg</b>	125	600 - 800	<b>3000 m</b>	7-10	<b>2 400 m</b>	9-13	<b>1940 m</b>	11-13
<b>14 Kg</b>	200	600 - 800	<b>14000 m</b>	7-10	<b>11200 m</b>	9-13	<b>9000 m</b>	11-13

Lieferant von Rostfreien Edelstahldrähten

